



Petine CD

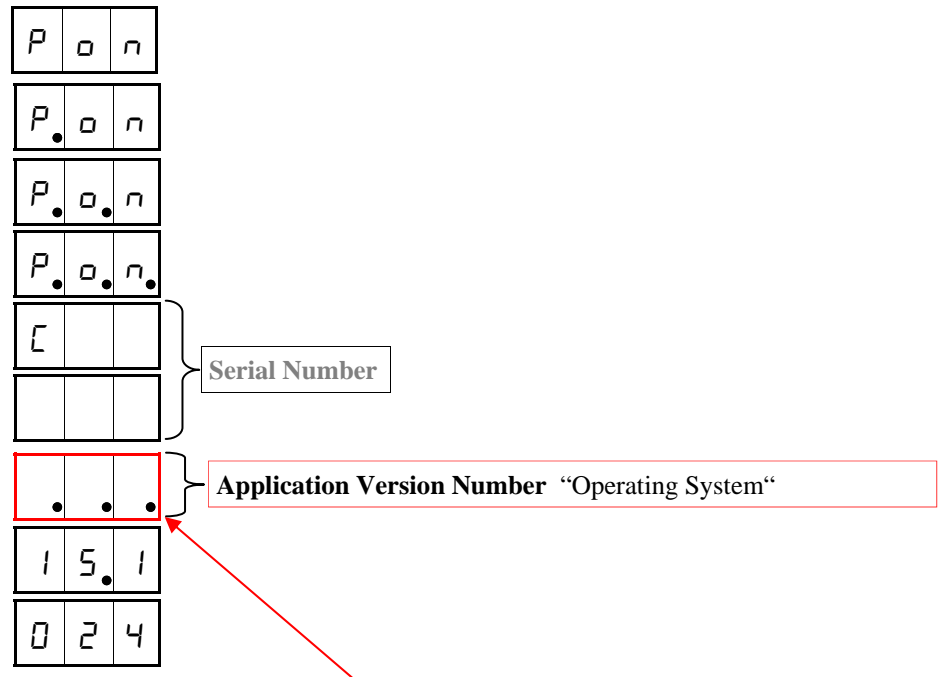
Update Procedures



QRS Music Technologies, Inc.

Easy Update Utility For Application Version 038 or Later

If the Petine's current application version is 038 or later this easy update utility may be used to automatically update both the Application and the Demo image files. To see what Application version is installed, turn the Petine unit ON and make note of the **Application Version Number** below.



If the Application Version Number is 038 or greater follow the instructions below.
 If smaller than 038 then go directly to page 3.

Insert the CDROM disk or CompactFlash card containing the image files. Power Petine OFF	
Press and Hold the ADJ Dial while powering Petine ON. When "P o n" appears Count 2 Seconds and then release the ADJ Dial button.	P o n
"545" will display to confirm that the system setup menu has been activated.	5 4 5
When the Application image is found "APL" will flash.	A P L
Petine will begin the update process.	U 2 3
When "5cc" displays press the ADJ Dial to continue.	5 c c
When the Demo image is found Petine will begin the upgrade process.	d n o
Petine will begin the update process.	U 2 3
When "5cc" displays press the ADJ Dial to continue.	5 c c
Petine automatically powers OFF to complete the upgrade process.	O F F
Go to page 5 to Copy SyncAlong Files From CDROM To CompactFlash	

Updating Petine's Application Image

Update from a CDROM

Update from a CompactFlash

Press Stop or make certain that there aren't any flashing dots in the display.		Press Stop or make certain that there aren't any flashing dots in the display.	
Insert the CD containing the appl.ima file.		Insert the CompactFlash card containing the appl.ima file.	
Press the ADJ Dial twice within one-half second to enter the Setup Menu.		Press the ADJ Dial twice within one-half second to enter the Setup Menu.	
Petine will open to the source section of the Setup Menu and display the current source.		Petine will open to the source section of the Setup Menu and display the current source.	
Press the ADJ Dial so that the dot begins to flash.		Press the ADJ Dial once so that the dot begins to flash.	
Rotate the ADJ Dial to display a large "C".		Rotate the ADJ Dial to display a large "F".	
Press the ADJ Dial to stop the dot from flashing.		Press the ADJ Dial to stop the dot from flashing.	
Rotate the ADJ Dial to move the dot to the middle display segment.		Rotate the ADJ Dial to move the dot to the middle display segment.	
Press the ADJ Dial so the dot flashes and then rotate the ADJ Dial to display a "A" for Application update.		Press ADJ so the dot flashes and then rotate the ADJ Dial to display a "A" for Application update.	
Press the ADJ Dial to stop the flashing.		Press the ADJ Dial to stop the flashing.	
Rotate the ADJ Dial to move the dot to the far right display segment. Press the ADJ Dial to Execute.		Rotate the ADJ Dial to move the dot to the far right display segment. Press the ADJ Dial to Execute.	
A "U" will display and the update countdown to zero will begin.		A "U" will display and the update countdown to zero will begin.	
Successful update!		Successful update!	
Press the ADJ Dial once.		Press the ADJ Dial once.	
Press the ADJ Dial twice within one-half second to exit the Setup Menu.		Press the ADJ Dial twice within one-half second to exit the Setup Menu.	

Updating Petine's Internal Music Source
















The demo image file contains the pre-programmed music located in the Internal Source of Petine. It also contains a hidden index file used to synchronize the SyncAlong series music.

Update from CDROM

Update from CompactFlash

Press Stop or make certain that there aren't any flashing dots in the display.		Press Stop or make certain that there aren't any flashing dots in the display.	
Insert the CD containing the demo.ima file.		Insert the CompactFlash card containing the demo.ima file.	
Press the ADJ Dial twice within one-half second to enter the Setup Menu.		Press the ADJ Dial twice within one-half second to enter the Setup Menu.	
Petine will open to the source section of the Setup Menu and display the current source.		Petine will open to the source section of the Setup Menu and display the current source.	
Press the ADJ Dial so that the dot begins to flash.		Press the ADJ Dial once so that the dot begins to flash.	
Rotate the ADJ Dial to display a large "C".		Rotate the ADJ Dial to display a large "F".	
Press the ADJ Dial to stop the dot from flashing.		Press the ADJ Dial to stop the dot from flashing.	
Rotate the ADJ Dial to move the dot to the middle display segment.		Rotate the ADJ Dial to move the dot to the middle display segment.	
Press the ADJ Dial so the dot flashes and then rotate the ADJ Dial to display a "d" for Application update.		Press ADJ so the dot flashes and then rotate the ADJ Dial to display a "d" for Application update.	
Press the ADJ Dial to stop the flashing.		Press the ADJ Dial to stop the flashing.	
Rotate the ADJ Dial to move the dot to the far right display segment. Press the ADJ Dial to Execute.		Rotate the ADJ Dial to move the dot to the far right display segment. Press the ADJ Dial to Execute.	
A "U" will display and the update countdown to zero will begin.		A "U" will display and the update countdown to zero will begin.	
Successful update!		Successful update!	
Press the ADJ Dial once.		Press the ADJ Dial once.	
Press the ADJ Dial twice within one-half second to exit the Setup Menu.		Press the ADJ Dial twice within one-half second to exit the Setup Menu.	

Copy SyncAlong Files From CDROM To CompactFlash

While playback is stopped, press the Petine's ADJ Dial twice within one-half second to enter the Setup Menu.	
Petine will open to the source section of the Setup Menu and display the current source.	
Press the ADJ Dial once so that the dot begins to flash.	
Rotate the ADJ Dial to display a large "C" and access the CD Drive's Utility functions.	
Press the ADJ Dial to stop the flashing.	
Rotate the ADJ Dial to move the dot to the center display segment.	
Press the ADJ Dial so the dot flashes.	
Rotate the ADJ Dial to display the a small "c" in the center display segment.	
Press the ADJ Dial to stop flashing.	
Rotate the ADJ Dial to move the dot to the far right display segment.	
Insert the update CDROM disk into the CD drive and the SyncAlong CompactFlash card in the reader.	
Press the ADJ Dial to execute the copy function.	
Petine will read a group of files from the CDROM...	
...and then copy the group to the CompactFlash card. Groups of files will be read and copied until the all files are copied. This will take several minutes.	
A countdown to zero will begin to verify that the files are copied.	
Press the ADJ Dial when "5cc" displays.	
	
Press the Petine's ADJ Dial twice within one-half second to exit the Setup Menu.	